



DX1001-T-PT

The modern, eco-friendly solution to fluid conditioning for Diesel

- Particle filtration down to **0.1 µm**
- Designed for diesel and kerosene
- Smart & effective maintenance system
- Operation and maintenance cost reduction
- Extend equipment lifetime
Extend oil drain intervals
- Minimised fluid oxidation
- Mitigation and reduction of varnish
- Increased production uptime
- Reduced fluid changes
- Eco-friendly
- Easy to service
- **100% Recycled** media



Maintaining healthy fluid by removing:

- Abrasive material to down **0.1 µm**
- Bacteria
- Water bound free and emulsified
- Oxidation products (Sludge and resin)
- Siloxane

DX1001-T-PT

| | |
|-------------------------|--|
| Drive Input | Electric |
| Connection Ports | Fluid dependant |
| Flow Indicator | Visual |
| Suggested System Volume | Fluid dependant |
| Flow rate | Starting from 3.0 lpm - Varies per application |
| Particulate Removal | From 0.1 µm |
| Weight | 20Kg |
| Dimensions | H 674mm x D 300 mm x L 550 mm |
| Material | SS316 |
| DXPT Cartridge QTY | 1 |

© 2022 Delta-Xero All Rights Reserved. All information contained in this publication is indicative only and may be subject to change without prior notice.




ایران-تهران- خیابان پاسداران پیشان هشت
پلاک ۱- برج آبین، طبقه ۴- واحد ۹
شماره تماس: ۰۲۱ ۷۳۶۴۰۰۰۰
info@rnaco.com





General Arrangement

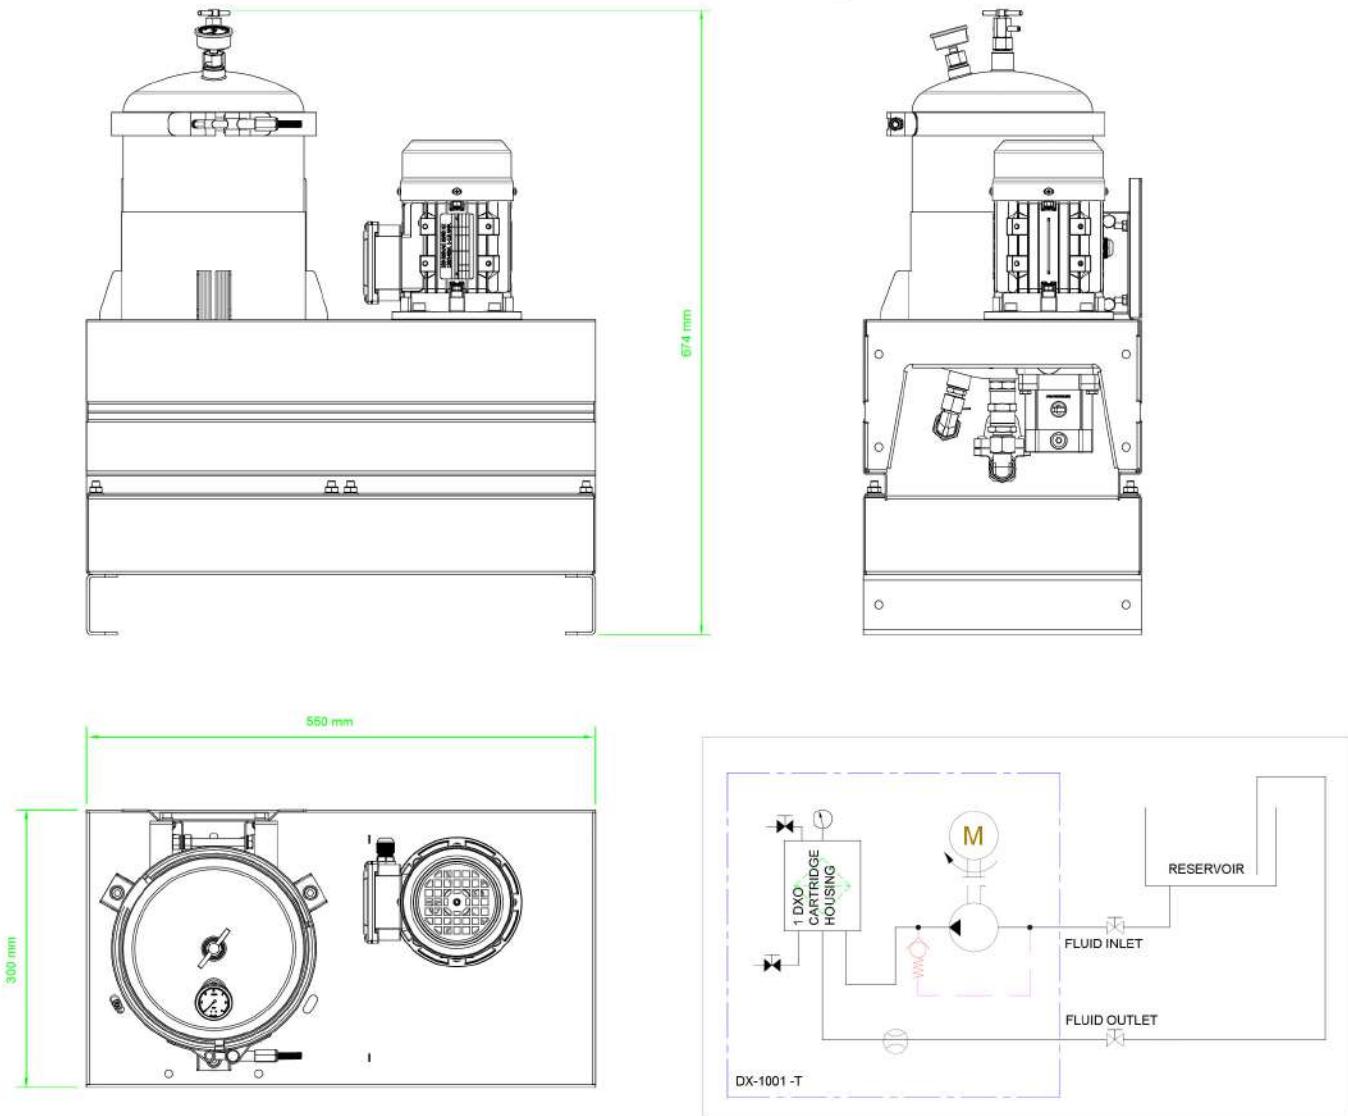

© 2022 Delta-Xero All Rights Reserved. All information contained in this publication is indicative only and may be subject to change without prior notice.



ایران-تهران- خیابان پاسداران پیشتر هشتاد
پلاک ۱ - برج آبین، طبقه ۴ - واحد ۹
شماره تماس: ۰۲۱ ۷۳۶۴۰۰۰۰
info@rnaco.com



نماینده فروش و خدمات پس از فروش DELTA-XERO در ایران