

DX1009-T-PT

The modern, eco-friendly solution to fluid conditioning for Diesel

- Particle filtration down to 0.1 μm
- · Designed for diesel and kerosene
- Smart & effective maintenance system
- Operation and maintenance cost reduction
- Extend equipment lifetime Extend oil drain intervals
- Minimised fluid oxidation
- Mitigation and reduction of varnish
- · Increased production uptime
- Reduced fluid changes
- Eco-friendly
- Easy to service
- 100% Recycled media

Maintaining healthy fluid by removing:

- Abraisive material to down 0.1 µm
- Bacteria
- · Water bound free and emulsified
- · Oxidation products (Sludge and resin)
- Siloxane



DX1009-T-PT

Drive Input	Electric
Connection Ports	Fluid dependant
Flow Indicator	Visual
Suggested System Volume	Fluid dependant
Flow rate	Starting from 20 lpm - Varies per application
Particulate Removal	From 0,1 µm
Weight	70kg
Dimensions	H 1158 mm x D 300 mm x L 1100 mm
Material	SS316
DXPT Cartridge QTY	9

© 2022 Delta-Xero All Rights Reserved. All information contained in this publication is indicative only and may be subject to change without prior notice




ایران-تهران-خیابان پاسداران بهستان هشتم پلاک ۱ - برج آبتین،طبقه ٤ - واحد ۹ ۱۲۰ ۲۳۶۶۰۰۰ نشماره تماس: ۱nfo@rnaco.com










General Arrangement

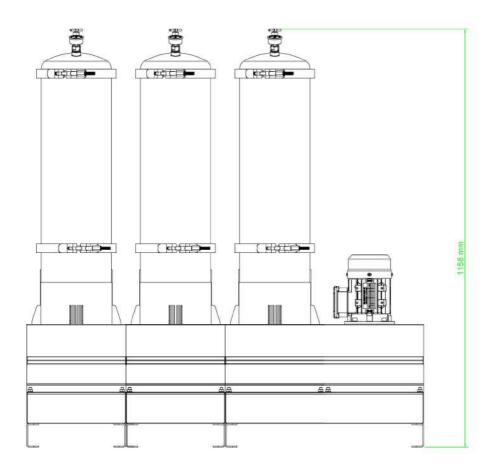

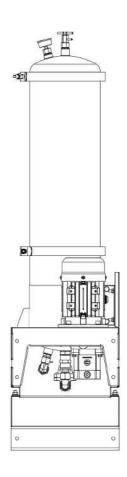

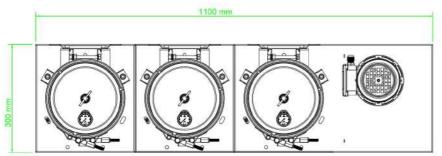



© 2022 Delta-Xero All Rights Reserved. All information contained in this publication is indicative only and may be subject to change without prior notice



