



## DX1012-T-PT

The modern, eco-friendly solution to fluid conditioning for Diesel

- Particle filtration down to **0.1 µm**
- Designed for diesel and kerosene
- Smart & effective maintenance system
- Operation and maintenance cost reduction
- Extend equipment lifetime  
Extend oil drain intervals
- Minimised fluid oxidation
- Mitigation and reduction of varnish
- Increased production uptime
- Reduced fluid changes
- Eco-friendly
- Easy to service
- **100% Recycled** media



### Maintaining healthy fluid by removing:

- Abrasive material to down **0.1 µm**
- Bacteria
- Water bound free and emulsified
- Oxidation products (Sludge and resin)
- Siloxane

### DX1012-T-PT

Drive Input	Electric
Connection Ports	Fluid dependant
Flow Indicator	Visual
Suggested System Volume	Fluid dependant
Flow Rate	Starting from 24 lpm - Varies per application
Particulate Removal	From <b>0.1 µm</b>
Weight	85Kg
Dimensions	H 1158 mm x D 300 mm x L 1374 mm
Material	SS316
DXPT Cartridge QTY	12

© 2022 Delta-Xero All Rights Reserved. All information contained in this publication is indicative only and may be subject to change without prior notice.







ایران-تهران- خیابان پاسداران پیشتر هشتم  
 بلاک ۱- برج آبین طبقه ۴- واحد ۹  
 شماره تماس: ۰۲۱ ۲۳۶۴۰۰۰-  
 info@rnaco.com





**DELTA-XERO**  
THE FUTURE IS SYSTEM RELIABILITY

## General Arrangement

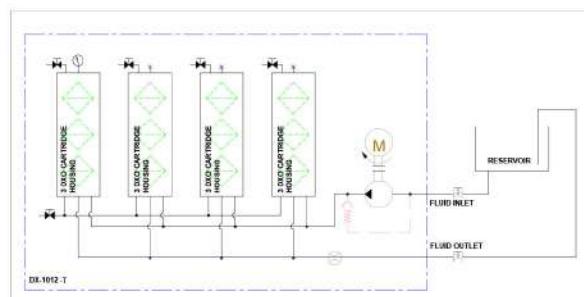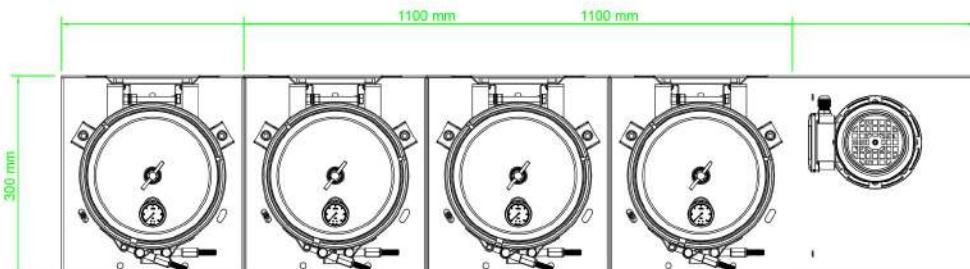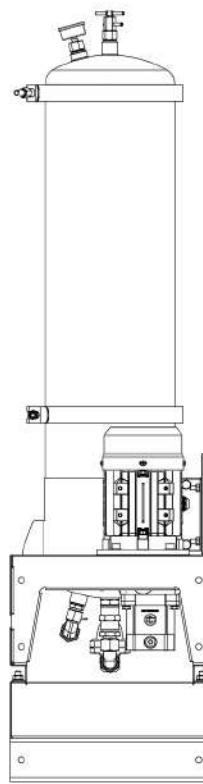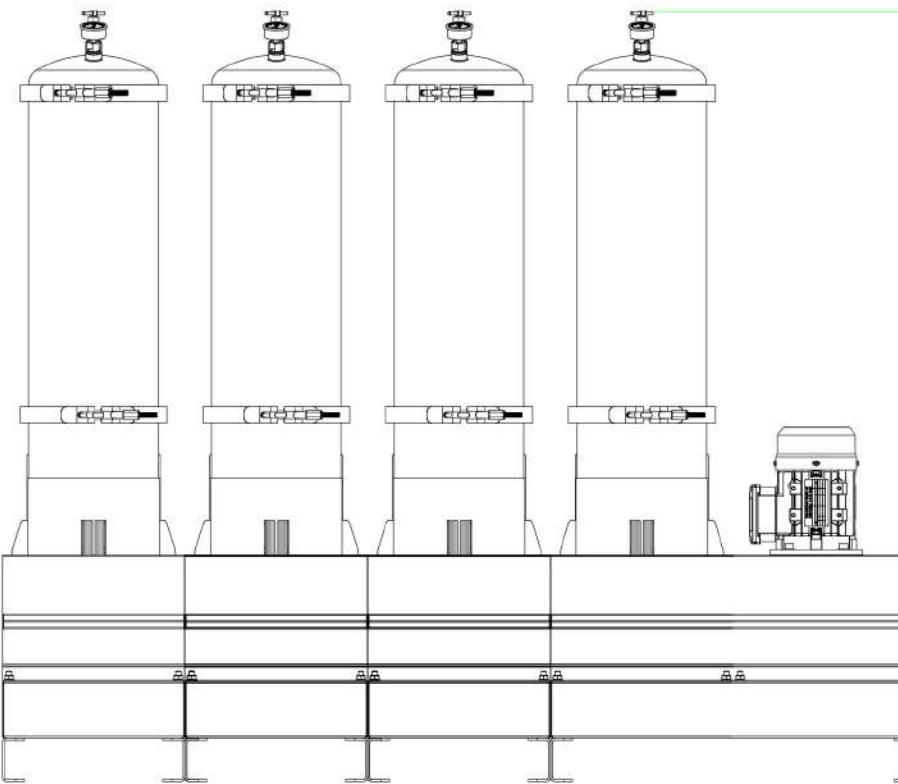

© 2022 Delta-Xero All Rights Reserved. All information contained in this publication is indicative only and may be subject to change without prior notice.



ایران - تهران - خیابان پاسداران هشتاد  
بلک ۱ - برج آبین، طبقه ۴ - واحد ۹  
شماره تماس: ۰۲۱ ۷۳۶۴...  
info@rnaco.com

