

## DX1006-T-PT-C

## The modern, eco-friendly solution to fluid conditioning for landfill gas engines

The DX modular housing arrangement offers a flexible and space conscious solution to integrate our innovative DXO Powertrain Cartridge. The Delta-Xero Powertrain system can be configured up to 12 cartridges in parallel as a single unit in a compact and easily maintainable layout.

The unit can be supplied with a number of standard options to provide an effective fluid conditioning and monitoring package to suit the majority of systems. The flexibility of the unit allows tailoring to customer's specific requirements.





## DX1006-T-PT

Drive Input	Electric
Connection Ports	3/4"BSP In & 1/2" Out
Flow Indicator	Visual
Suggested System Volume	Up to 1200 ltrs
Flow Rate	Starting from 6lpm - varies per application
Particulate Removal	From 0,1 µm
Weight	90Kg
Dimensions	H 1158 mm x D 440 mm x L 1100 mm
Material	SS316
DXPT Cartridge QTY	6

🗈 2022 Delta-Xero All Rights Reserved. All information contained in this publication is indicative only and may be subject to change without prior notice




ایران-تهران-خیابان پاسداران بهستان هشتم پلاک ۱ – برج آبتین،طبقهٔ ۶ – واحد ۹ شماره تماس: ۲۱ ۷۳۶۶۰۰۰ info@rnaco.com







## **General Arrangement**

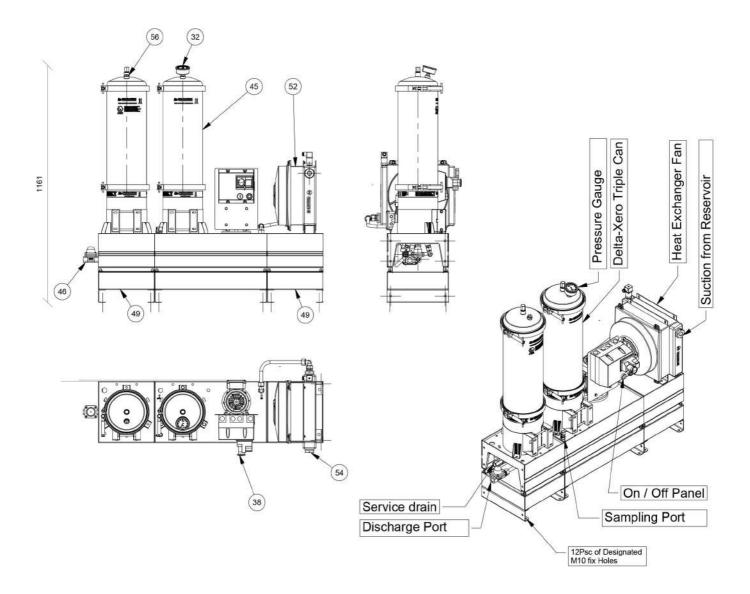

© 2022 Delta-Xero All Rights Reserved. All Information contained in this publication is indicative only and may be subject to change without prior notice.



