



DELTA-XERO

THE FUTURE IS SYSTEM RELIABILITY

DX1525

The DX1525 system has been designed to be our most compact and cost effective fluid conditioning unit on offer.

Engineered to fill a gap in our product offerings for smaller volume systems the DX1525 is ideal for keeping fluid in reservoirs upto 1000 litres in optimum health,

With budgets for maintenance ever decreasing Delta-Xero wanted to ensure that all market segments like plastic extrusion or the wind turbine industry could easily and cost effectively reduce their carbon foot print.

The DX1525 can also be supplied with a number of options to provide an effective fluid conditioning and monitoring package to suit the majority of systems.

These units come both floor and wall mountable.



DX1525


Drive Input	Electric
Connection Ports	3/8" BSP In & Out
Flow Indicator	Visual
Suggested System Volume	Up to 1000l @ 32cSt
Flow Rate	Starting from 0.5 lpm
Particulate Removal	From 0.1 μ
Weight	13 kg
Dimensions	H 386 mm x D 230 mm x L 435 mm
Material	SS304, 316 and Aluminum
DXO-1525 Cartridge QTY	1



ایران - تهران - خیابان پاسداران پستستان هشتم
پلاک ۱ - برج آبتین، طبقه ۴ - واحد ۹
شماره تماس: ۰۲۱ ۷۳۶۴۰۰۰
info@rnaco.com



General Arrangement + Schematic

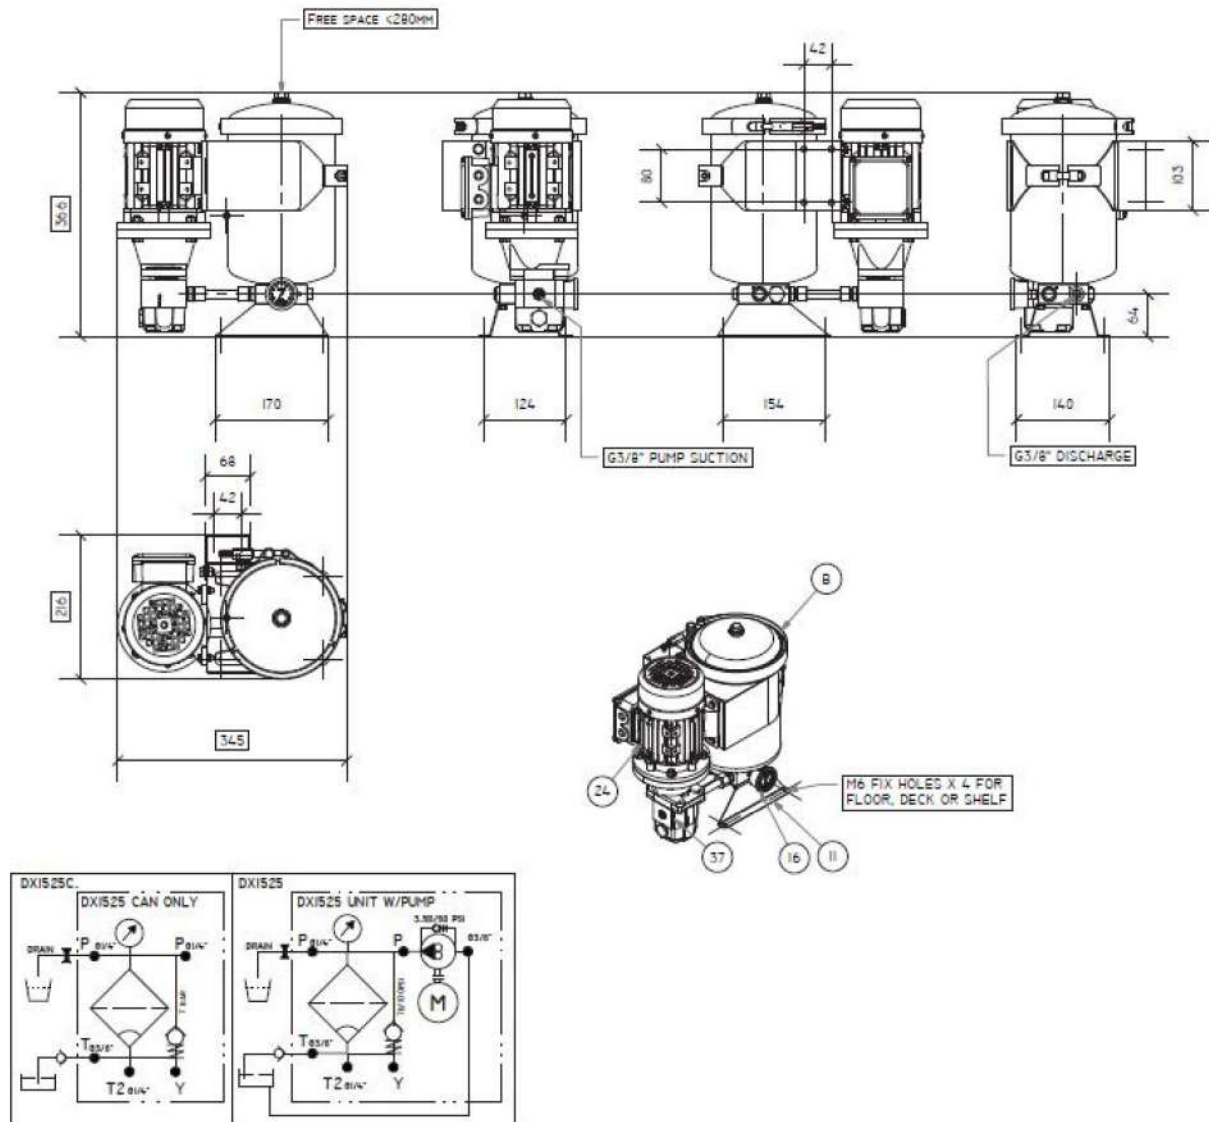

Cartridge Data: DXO-1525

Contaminated weight:	Up to 18kg
Water holding capacity, free and bound:	Approx. 800ml
Material insert:	PP Cellulose mix



ایران - تهران - خیابان پاسداران پستستان هشتم
پلاک ۱ - برج آبتین، طبقه ۴ - واحد ۹
شماره تماس: ۰۲۱ ۷۳۶۴۰۰۰
info@rnaco.com